Acoustic Test Report - Absorption

Absorption Class: B
Calculated to EN ISO 11654-1997

Fabric: Coloured Wool Serge
Fullness: 50%
Cavity from Wall: 350mm

J&C Joel
Inspiration in every performance

Data Sheet 18

The Laboratory Measurement of Random Incidence Sound Absorption generally to BS EN ISO 354:2003

Client: J & C Joel Ltd
Test Date: 30/11/2020

Empty Room:	**Temperature:**	16.4	°C	**Humidity:**	57	%RH	**Pressure:**	1016 mbar
Room with Sample:	**Temperature:**	15.7	°C	**Humidity:**	56	%RH	**Pressure:**	1009 mbar

Sample Description: Coloured Wool Serge - Single Layer - 50% Fullness (Approx. Weight 500g/m²) - 350mm Cavity From Wall

Mounting Method: G - 350
Sample Area: 9 m²
Chamber Volume: 300 m³

	Test 18			
Freq Hz	T1 sec	T2 sec	Absorp Coeff α_s	Practical Absorp Coeff #
*50**	*5.15*	*4.78*	*0.08*	
*63**	*4.83*	*4.91*	*-0.02*	*n/a*
*80**	*7.33*	*6.13*	*0.15*	
100	7.42	5.95	0.18	
125	7.17	4.91	0.35	0.30
160	6.75	4.40	0.43	
200	6.77	4.32	0.45	
250	6.80	3.83	0.62	0.60
315	6.65	3.52	0.73	
400	6.46	3.25	0.83	
500	5.63	3.10	0.79	0.80
630	5.00	2.83	0.83	
800	5.22	2.83	0.88	
1000	5.79	2.95	0.90	0.90
1250	5.75	2.90	0.93	
1600	5.33	2.73	0.97	
2000	4.93	2.66	0.93	0.95
2500	4.35	2.41	0.99	
3150	3.55	2.12	1.01	
4000	2.92	1.81	1.10	1.00
5000	2.34	1.54	1.14	
*6300**	*1.60*	*1.14*	*1.26*	
*8000**	*1.30*	*0.98*	*1.21*	*n/a*
*10000**	*0.93*	*0.72*	*1.49*	

α_w 0.85(H)

Class B


Calculated to EN ISO 11654:1997

NRC 0.80

Calculated to ASTM C 423-01

** Denotes frequencies outside the range covered by BS EN ISO 354:2003*

T1, empty room reverberation time
T2, room reverberation time with sample

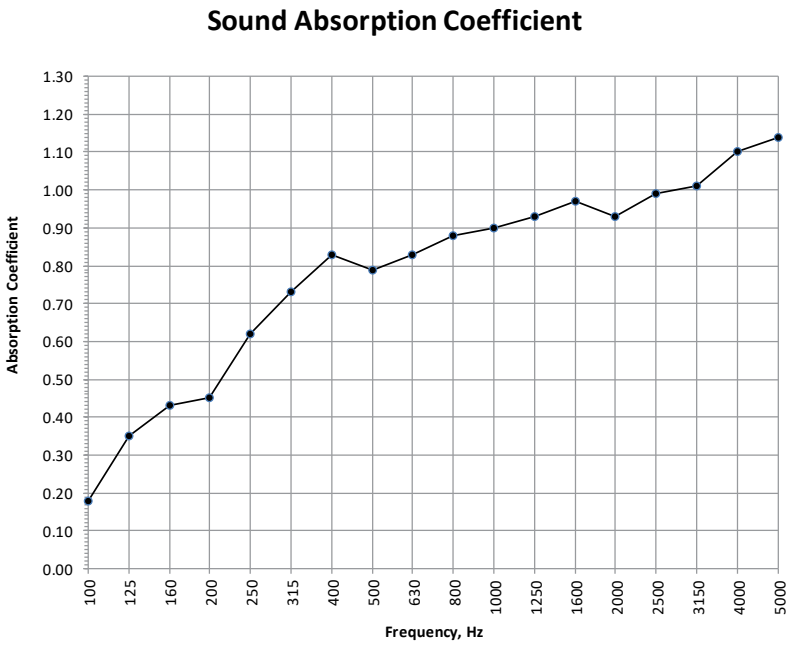

Practical absorption coefficient, BS EN ISO 11654:1997 | v5

United Kingdom
+44 1422 833835
uksales@jcjoel.com

United Arab Emirates
+971 4 884 7801
menasales@jcjoel.com

www.jcjoel.com