

Joelmat

Perfect For: • Decorative/Scenic • Film & TV • Stage

J&C Joel 

the inspiration behind the performance

Contents

Composition & Care

200 cm	3
Fire Certificate	
BS4790	4
EN13501-1	7
AS/ISO 9239.1-2003	13

TECHNICAL



NDFR

Non Durably Flame Retardant

chemically treated with a water solution and if wetted in any way should be retreated



DFR

Durably Flame Retardant

chemically treated to withstand a number of cleanings



IFR

Inherently Flame Retardant

woven from fibres with a high flame retardancy



FR

Flame Retardant

chemically treated to an individual specification



NOT FR

Not Flame Retardant no flame retardant treatment



Confirmation that the fabric meets one or more flame retardant standards

BS5867 BS5867 Pt2 B is the British Standard for flame retardant fabrics used for curtains and drapes

BS5852 BS5852 Pt1 is the British Standard for flammability of upholstered composites for seating

BS4790 BS4790: 1987 Determination of the effects of a small source of ignition on textile floor coverings hot metal nut method (method 1, loose laid)

EN13773: 2003 Meets European fire safety standards for vertically hung fabrics. Burning behavior, ignitability testing of curtain fabric for use in the contract market.

TL 1080-0002/8 German Military Specification for horizontally tested materials

EN14041 Details the requirement for CE Marking of textiles, laminate and resilient floor coverings

BS7905-1:2001 Lifting equipment for performance, broadcast and similar applications.

ATTRIBUTES



Approx roll length of material in linear metres (m) & feet (ft)



Approx width of material in centimetres (cm) & inches (")



Approx weight in grams per metre squared (g/m²)



Approx thickness in (mm)

M1, M2, M4 Conforms to French Fire Regulations

B1, B2 Conforms to German Fire Regulations DIN 4102

IMO Conforms to International Maritime Organisation regulations

Classe Uno Meets Italian Fire Regulations

BS EN13501-1 Fire Classification of construction, products and building elements. Classification using test data from reaction to fire tests






CFC EN ISO 9239-1 Reaction to fire test. Horizontal surface spread of flame on floor covering system. Determination of the burning behaviour using a retardant heat source


NFPA 701 NFPA 701: (USA) Standard Methods of Fire Tests for Flame Propagation of Textiles and Films


EN9239-1 Reaction to fire tests – horizontal surface spread of flame on floor covering systems


DIN EN1021 Meets European fire safety standards for exposure to different ignition sources, namely a lit cigarette and butane flame. Assessment of the ignitability of upholstered furniture


To ensure you get the best from the product supplied to you, we advise you follow the care instructions within this datasheet.


Fabric	Flame Retardancy	DFR
	Fire Certification	EN13501-1, BS4790, AS ISO 9239.1
	Brand Name (and Manufacturer)	J&C Joel Ltd.
	Material (Blending Ratio)	Vinyl, Glass Fibre Reinforced
	Construction of Fabric	Non-Woven
Chemicals	Surface Treatments	Non
	Brand Name of Flame Retardant Chemicals	N/A
	Chemical name of Flame Retardant Chemicals	Phosphorus Compund
	Process of Flame Retardant Chemicals	Mixed Into Mass
Care	Information	<p>Durably Flame Retardant. This means that this type of flooring is chemically treated to meet the flammability requirements of EN13501-1, BS4790 and AS ISO 9239.1. FR properties will be maintained if subject to moisture.</p> <p>For cleaning use an Alkaline PVC compatible detergent.</p>
	Laundering Treatment	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Do Not Dry Clean </div> <div style="text-align: center;">  Do Not Wash </div> <div style="text-align: center;">  Do Not Bleach </div> <div style="text-align: center;">  Do Not Iron </div> <div style="text-align: center;">  Do Not Tumble Dry </div> </div>
Notes		



Fire Rating:
DFR


Approx Roll Length:
25m / 82ft


Width:
200cm / 79"


Weight:
1340 g/m²


Fire Certification:
EN13501-1, BS4790,
AS ISO 9239.1


Colours Available

For further information please contact our sales team sales@jcjoel.com

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: BS4790

J&C Joel

the inspiration behind the performance



TESTING • CERTIFICATION • AUDITING

Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@btg.co.uk
Website: www.btg.co.uk

Date: 14 August 2017

Our Ref: 53645-1

Your Ref: -

Page: 1 of 3

Client: J. & C. Joel Limited
Corporation Mill
Corporation Street
Sowerby Bridge
Halifax
HX6 2QQ

Job Title: Hotel Metal Nut Test

Client's Order No: -

Date of Receipt: 16 June 2017

Date of Test Start: 21 June 2017

Description of Sample(s): One sample identified as follows was received for testing:
Joelmat, stated to be DFR

Work Requested: We were asked to make the following test:

Fire test according to BS 4790:1987 (2014)



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: BS4790

J&C Joel 
the inspiration behind the performance



J. & C. Joel Limited

Sample was identified as follows:

Joelmat, stated to be DFR

Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@bttg.co.uk
Website: www.bttg.co.uk

Date: 14 August 2017

Our Ref: 53645-1
Your Ref: -

Page: 2 of 3

FIRE TESTS ACCORDING TO BS 4790:1987 (2014)

Determination of the effects of a small source of ignition on textile floorcoverings, (Hot Metal Nut Method)

Procedure

The sample was tested according to the above standard. The sponsor sampled the material and the specimens were cut from the sample received to the dimensions set out in the standard by BTTG.

Requirements

The results were classified according to BS 5287:1988 (2014) - 'Assessment and Labelling of Textile floorcoverings tested to BS 4790' The full descriptions of the classifications, abbreviated to low, medium or high in the table of results, are as follows:-

low radius of effects of ignition (up to 35mm)

medium radius of effects of ignition (40 to 75mm)

high radius of effects of ignition (80mm or over).



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: BS4790

J&C Joel

the inspiration behind the performance



TESTING • CERTIFICATION • AUDITING

Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@btg.co.uk
Website: www.btg.co.uk

Date: 14 August 2017

Our Ref: 53645-1

Your Ref: -

Page: 3 of 3

J. & C. Joel Limited

Results

Duration of Flaming (s)	Greatest radius of char		Class
	Face (mm)	Back (mm)	
33	25	15	Low
31	25	15	Low
33	20	15	Low

Note

The test results relate only to the behaviour of the test specimens after application of a small source of ignition; they shall not be used as a means of assessing how the product will contribute to an established fire

The test was carried out on specimens loose laid onto 6mm calcium silicate non-combustible backing boards, in accordance with mounting method 1.

Please note that a high classification is the worst result and a low classification is the best result. Also the end result is based on the worst specimen of the three specimens tested.

Reported by: *B Marsden*
B Marsden (Mrs)
Fire Technician

Countersigned By: *P Doherty*
P Doherty
Operational Head

Enquiries concerning this report should be addressed to Customer Services.



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: EN13501-1

J&C Joel

the inspiration behind the performance



ÖTI – Institut für Ökologie, Technik und Innovation GmbH



Report 66002

Classification Report on Burning Behaviour

Applicant

Reference

Application

2. extension of the period of validity of the classification 44074.

Test Material

"Unifloor 030/I"

Material used in testing was anonymized for laboratory purposes. A detailed sample list is contained in the report.

Issuing and Signatures

Number of pages contained: 6

Original Issue / Vienna 2011-06-01 / Rm/AM/KK 3149

Authorised for Institute
DI (FH) Angelika Hönecke




Technology
Ing. Judith Pointner ☎ 28 / pointner@oeti.at



• ÖTI – Institut für Ökologie, Technik und Innovation GmbH • Spengergasse 20 • A-1050 Wien • Austria •
• Tel. +43 1 5442543-0 • Fax +43 1 5442543-10 • Email office@oeti.at • Web www.oeti.at • FN: 326826b • UID-Nr ATU65149029 •
• UniCredit Bank Austria AG • BLZ 12000 • Konto 23410378800 • Iban AT941200023410378800 • Swift BKAUATWW • Eori ATEOS1000015903 •
• Es gelten ausschließlich unsere Allgemeinen Geschäftsbedingungen • Only our General Terms and Conditions apply •

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: EN13501-1

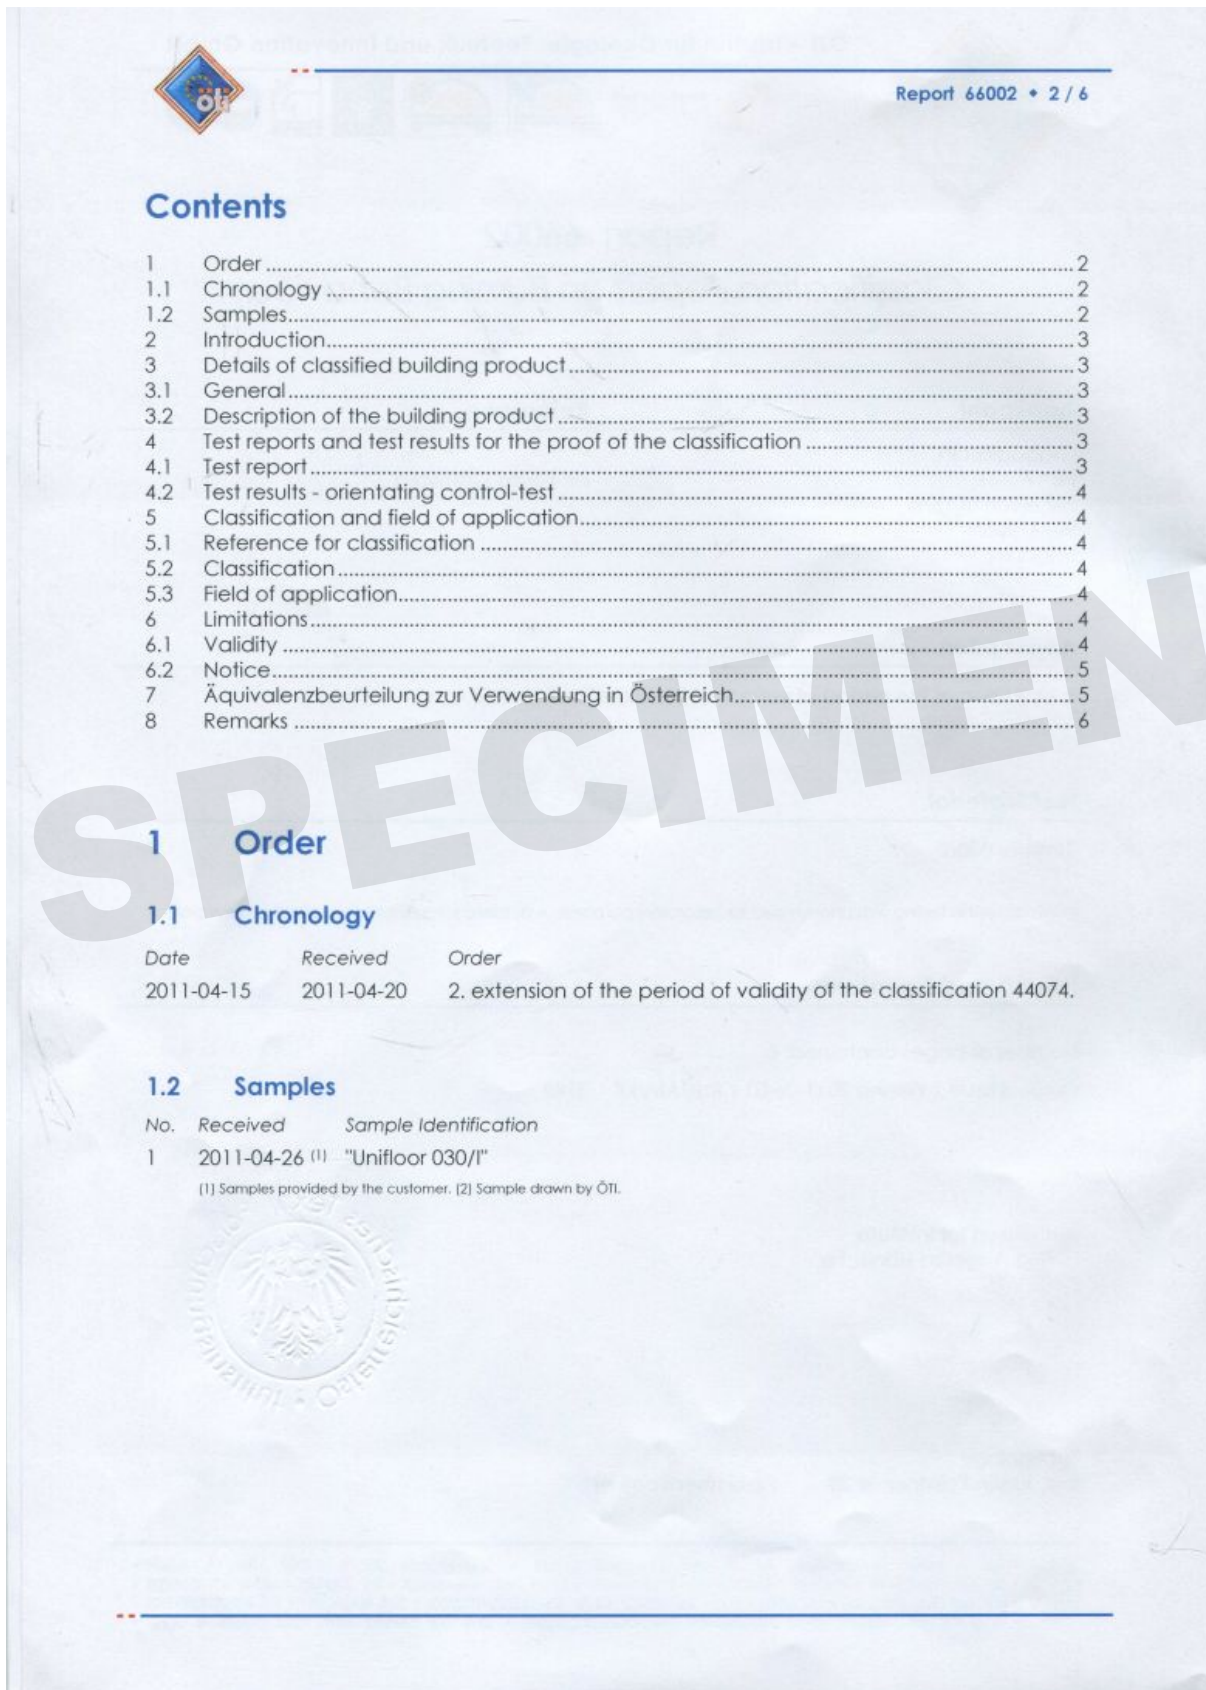



2 Introduction

This classification report defines the classification assigned to the building product "Unifloor 030/I" in accordance with the test methods fixed in EN 13501-1.

An orientating control-test of the burning behaviour of the submitted sample was performed. (See pt. 4.2)

3 Details of classified building product

3.1 General

The building product "Unifloor 030/I" is defined as flooring, the classification is valid for the end use application described under point 5.3.

3.2 Description of the building product

Material (of wear layer):	PVC (according to the specification by the applicant)
Construction:	heterogeneous
Kind of wearlayer:	non transparent wear layer
Structure of wearlayer:	smooth floor covering
Colouring:	plain (single coloured)
Dimensions:	rolls
Type of floor covering:	PVC floor covering with foam layer according to EN 651

	specification by ÖTI	specification by the applicant
Total mass	1260 g/m ²	1300 g/m ²
Total thickness	1.8 mm	2.0 mm
Density	--	1250 kg/m ³

The applicant of this classification report guarantees the observance of the instructions of the product specification according to EN 651.

4 Test reports and test results for the proof of the classification

4.1 Test report

Laboratory	ÖTI
Test report number	44074
Date of issue of the classification report	29th July 2003
Applicant	Graboplast Rt
Test methods	EN ISO 11925-2 and EN ISO 9239-1

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: EN13501-1



Report 66002 + 4 / 6

4.2 Test results - orientating control-test

	Test results	Number of tests
Burning behaviour, EN ISO 9239-1		
Critical radiant flux	≥ 11 kW/m ²	1
Integral of smoke obscuration	95 %min	1

5 Classification and field of application

5.1 Reference for classification

This classification was carried out within the scope of the classification report **44074** from **29th July 2003** in accordance with EN 13501-1 pt. 11 and 12.2.

5.2 Classification

Due to the results of the orientating control-test which was carried out, the primordial classification of the building product "**Unifloor 030/I**" is approved.

Burning behaviour	Smoke emission
C _{fl}	s1
Classification	
C _{fl} -s1	

5.3 Field of application

The classification is valid for the building product described in point 3 under the following end use conditions.

Application	Horizontal laid floor covering in form of rolls
Subfloors	Not burnable subfloors of euroclass A1 _{fl} or A2 _{fl} with a density of at least 1350 kg/m ³ .
Installation	glued
Adhesive	Dispersion adhesive Eurocol 643 or similar Note: According to EN13501-1 the stated classification is valid for the tested floor covering together with the tested adhesive, as well as for all other adhesives of the same generic type as the tested adhesive.

6 Limitations

6.1 Validity

Based on the present documents and the results of the performed control-test the validity of the classification report **44074** can be confirmed.

The report stays valid as long as the products are produced in unchanged condition; this is in the responsibility of the manufacturer.



6.2 Notice

This classification document does not represent type permission or certifying the product.

If a building product should be CE marked according to system 3 of the attestation of conformity systems, the classification stated with this report is suitable as a basis for the declaration of the producer according to the attestation of conformity system 3, together with a CE marking in the context of the directive relating to construction products.

If the manufacturer plans a CE marking in connection with conformity system 3, he has to give an explanation, which has to be attached to the relevant documents. This explanation confirms, that there are no the specific materials, production processes or procedures (e.g. no additives of flame retarding materials, delimitation of organic components or additions of fillers), which are improving the burning behaviour to reach the obtained fire classification. As a consequence from this, the manufacturer drew the conclusion that the system 3 of the attestation of conformity systems is appropriate.

The testing laboratory therefore has played no role in the sampling procedure, although the testing laboratory keeps appropriate references from the manufacturer ready, in order to pursue the examined samples.

7 Äquivalenzbeurteilung zur Verwendung in Österreich

Unter Zugrundlegung der Anforderungsbedingungen ist eine eindeutige Zuordnung der ehemaligen österreichischen Brandklassifizierung zu einer europäischen Klasse nicht immer möglich und bedarf umfassender Einstufungserfahrung.

Die vorliegende Äquivalenzbeurteilung soll als Hilfestellung verstanden werden die zeigen soll, in welche europäische Klasse ein Bauprodukt fallen kann, das gemäß österreichischen Normen eingestuft wurde und umgekehrt.

Einstufung gemäß EN 13501-1	Anforderungen aus landesgesetzlichen Bestimmungen	
A1 ^{II}	nichtbrennbar, schwachqualmend	A
A2 ^{II} -s1		
B ^{II} -s1	schwerbrennbar, schwachqualmend	B1
C ^{II} -s1		
D ^{II} -s1	normalbrennbar, schwachqualmend	B2
A2 ^{II} -s2		
B ^{II} -s2		
C ^{II} -s2		
D ^{II} -s2		
E ^{II}	leichtbrennbar	B3
F ^{II} ¹⁾		


¹⁾ Es wird darauf hingewiesen, dass die Europäische Klasse F auch die Tatsache ausdrücken kann, dass noch gar keine Klassifizierung stattgefunden hat.

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: EN13501-1

J&C Joel 

the inspiration behind the performance

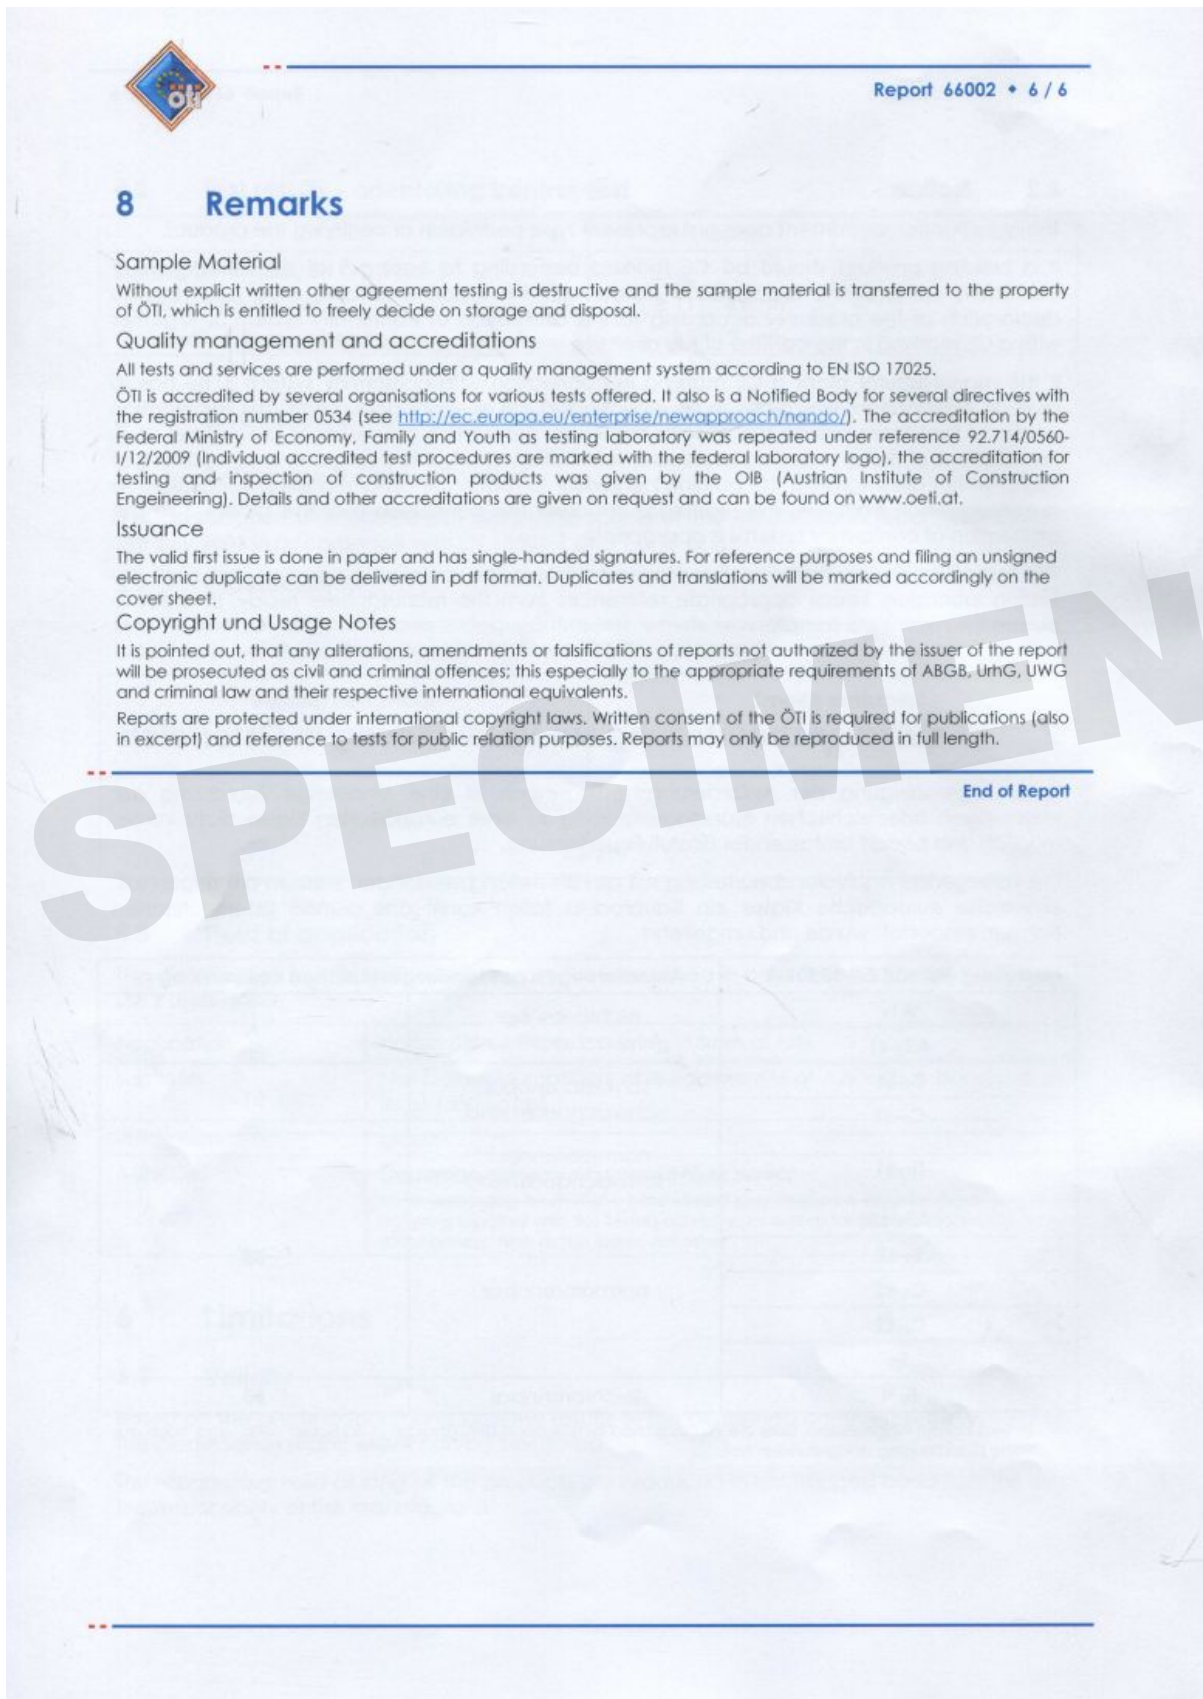

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: AS/ISO 9239.1

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
 A.B.N 43 006 014 106
1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

Client : J & C Joel Ltd Corporation Mill, Corporation Street Sowerby Bridge, Halifax, HX6 2QQ ENGLAND	Test Number : 18-006144 Issue Date : 6/12/2018 Print Date : 16/05/2019
---	---

Sample Description Clients Ref : "Joelmat:
 PVC flooring material
 Colour : Cream
 Nominal Composition : Vinyl with glass reinforcement, solvent free
 Nominal Mass per Unit Area/Density : 1340g/m2
 Nominal Thickness : 2mm

AS/ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival 16/10/2018
 Date Tested 06/12/2018

CHF Value	1	2	3	Mean	
Non Directional	7.2	9.7	8.7	8.5	kW/m ²
HF-30 Value	1	2	3	Mean	
Non Directional	-	-	-	-	kW/m ²
Smoke Value	1	2	3	Mean	
Non Directional	31	56	40	42	%.min

165817 31548

Page 1 of 2

© Australian Wool testing Authority Ltd
 Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
 - Chemical Testing
 - Mechanical Testing
 - Performance & Approvals Testing

: Accreditation No. 983
 : Accreditation No. 985
 : Accreditation No. 1356



Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
 MANAGING DIRECTOR

0204/11/06

Fire Test Certificate – Specimen

Fabric: Joelmat
Type: AS/ISO 9239.1

J&C Joel 
the inspiration behind the performance

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106
1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

Client : J & C Joel Ltd
Corporation Mill, Corporation Street
Sowerby Bridge, Halifax, HX6 2QQ
ENGLAND

Test Number : 18-006144
Issue Date : 6/12/2018
Print Date : 16/05/2019

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Each specimen was clamped to a substrate of 6mm thick fibre reinforced cement board prior to testing.

No directional properties, three specimens tested only.

HF30 not reported as flame out time occurred before 30 minutes.

SPECIMEN

165817

31548

Page 2 of 2

© Australian Wool testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing

- Chemical Testing
- Mechanical Testing
- Performance & Approvals Testing

: Accreditation No. 983
: Accreditation No. 985
: Accreditation No. 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR

0204/11/06

J&C Joel

the inspiration behind the performance



J&C Joel United Kingdom - HQ
uksales@jcjoel.com



J&C Joel Europe
eusales@jcjoel.com



J&C Joel Middle East
uaesales@jcjoel.com



J&C Joel Vietnam
asiasales@jcjoel.com



J&C Joel Macau
asiasales@jcjoel.com



J&C Joel Hong Kong
asiasales@jcjoel.com