


Mohair Velvet

Perfect For: Masking • Decorative/Scenic • Film & TV • Stage

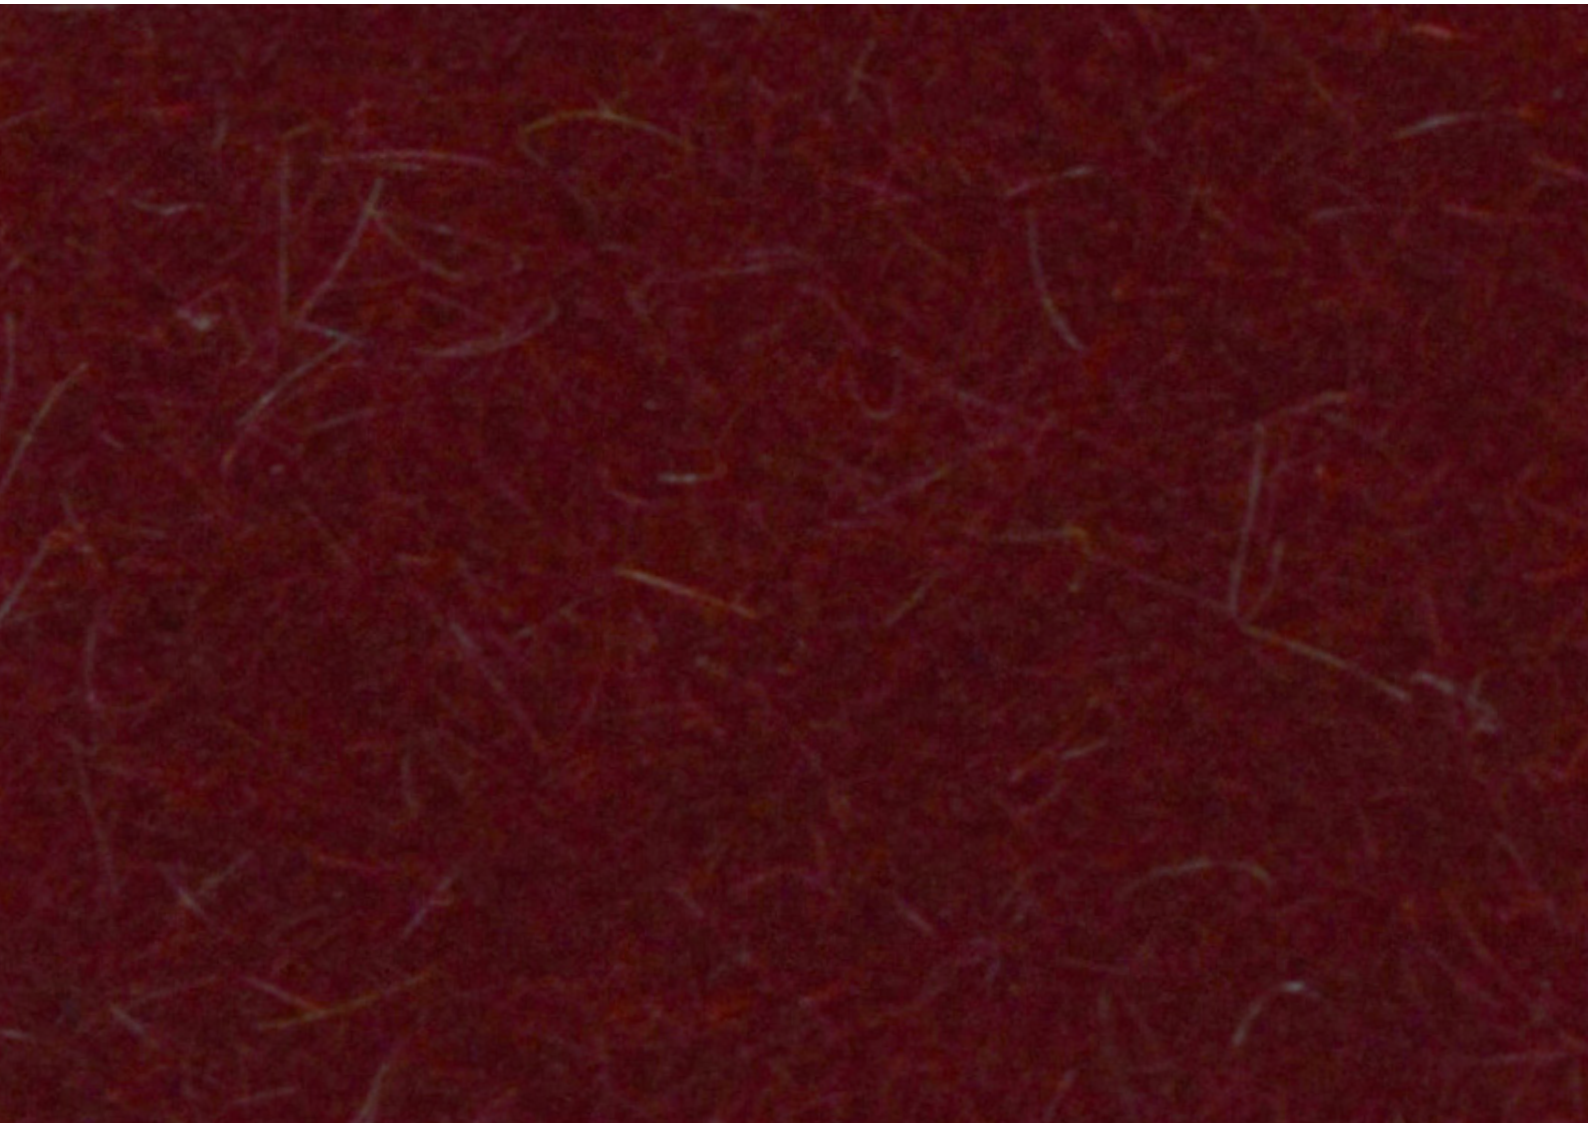

J&C Joel TM
Inspiration in every performance

Composition & Care

140 cm 3

TECHNICAL



NDFR
Non Durably Flame Retardant
chemically treated with a water solution and if wetted in any way should be retreated



DFR
Durably Flame Retardant
chemically treated to withstand a number of cleanings



IFR
Inherently Flame Retardant
woven from fibres with a high flame retardancy



FR
Flame Retardant
chemically treated to an individual specification



NOT FR
Not Flame Retardant no flame retardant treatment



Confirmation that the fabric meets one or more flame retardant standards

BS5867 BS5867 Pt2 B is the British Standard for flame retardant fabrics used for curtains and drapes

BS5852 BS5852 Pt1 is the British Standard for flammability of upholstered composites for seating

BS4790 BS4790: 1987 Determination of the effects of a small source of ignition on textile floor coverings hot metal nut method (method 1, loose laid)

EN13773: 2003 Meets European fire safety standards for vertically hung fabrics. Burning behavior, ignitability testing of curtain fabric for use in the contract market.

TL 1080-0002/8 German Military Specification for horizontally tested materials

EN14041 Details the requirement for CE Marking of textiles, laminate and resilient floor coverings

BS7905-1:2001 Lifting equipment for performance, broadcast and similar applications.

ATTRIBUTES



Approx roll length of material in linear metres (m) & feet (ft)



Approx width of material in centimetres (cm) & inches (")



Approx weight in grams per metre squared (g/m²)



Approx thickness in (mm)

M1, M2, M4 Conforms to French Fire Regulations

B1, B2 Conforms to German Fire Regulations DIN 4102

IMO Conforms to International Maritime Organisation regulations

Classe Uno Meets Italian Fire Regulations

BS EN13501-1 Fire Classification of construction, products and building elements. Classification using test data from reaction to fire tests






CFC EN ISO 9239-1 Reaction to fire test. Horizontal surface spread of flame on floor covering system. Determination of the burning behaviour using a retardant heat source








NFPA 701 NFPA 701: (USA) Standard Methods of Fire Tests for Flame Propagation of Textiles and Films

EN9239-1 Reaction to fire tests – horizontal surface spread of flame on floor covering systems

DIN EN1021 Meets European fire safety standards for exposure to different ignition sources, namely a lit cigarette and butane flame. Assessment of the ignitability of upholstered furniture

To ensure you get the best from the product supplied to you, we advise you follow the care instructions within this datasheet.

Fabric	Flame Retardancy	NDFR
	Fire Certification	BS5867
	Brand Name (and Manufacturer)	J&C Joel Ltd
	Material (Blending Ratio)	100% Mohair Pile / 100% Cotton Base
	Construction of Fabric	"V" Weave
Chemicals	Surface Treatments	Dyed & Flameproofed
	Brand Name of Flame Retardant Chemicals	N/A
	Chemical name of Flame Retardant Chemicals	N/A
	Process of Flame Retardant Chemicals	Immersion
Care	Information	<p>Non-Durably Flame Retardant. This means that the fabric is chemically treated and if wet (in any way) should be retreated to meet the flammability requirements of BS5867 Part 2 Type B. Therefore, the cloth will not withstand wet cleaning and should be re-flame proofed whenever wet. The cloth can be professionally dry cleaned using the correct chemical process.</p> <p>Notwithstanding the aforementioned, it would be our advice to only dry clean this material periodically. We would suggest that the curtain be soft-brushed on a regular basis and periodically cleaned using a vacuum and drapery attachment. Commercial flame retardants may alter the aesthetics, appearance, colour or performance of the textile material.</p> <p>This fabric is not pre-shrunk.</p>
	Laundering Treatment	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> Dry Clean Only</div> <div style="text-align: center;"> Do Not Wash</div> <div style="text-align: center;"> Do Not Bleach</div> <div style="text-align: center;"> Do Not Iron</div> <div style="text-align: center;"> Do Not Tumble Dry</div> </div>
Notes	Approx Pile Height: 3.5mm	

						
Fire Rating: NDFR	Approx Roll Length: 25m / 82ft	Width: 140cm / 55"	Weight: 575 g/m ²	Fire Certification: BS5867	Colours Available 20	Fabric Thickness: 3.67 mm

Determination of fabric thickness BS EN ISO 5084: 1997. Test report available upon request.

For further information please contact our sales team sales@jcjoel.com

J&C Joel

the inspiration behind the performance



J&C Joel United Kingdom - HQ
uksales@jcjoel.com



J&C Joel Europe
eusales@jcjoel.com



J&C Joel Middle East
uaesales@jcjoel.com



J&C Joel Vietnam
asiasales@jcjoel.com



J&C Joel Macau
asiasales@jcjoel.com



J&C Joel Hong Kong
asiasales@jcjoel.com